


COPPER SHORT AND STANDARD BUTT SPLICES

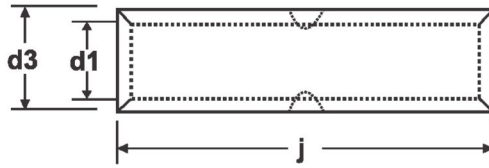

CAT. NO.	CABLE AWG/MCM	d1	d3	j	TOOL RECOMMENDED DIE REFERENCE	NO. OF CRIMPS	STRIP LENGTH
CELC 1.5 - 22	16	1.8	3.7	22	M=MH14	4	8mm
CELC 2.5 - 22	14	2.4	4.0	22	M=MH14	4	8mm
CELC 4 - 22	12	3.1	4.8	22	M=MH14	4	8mm
CELC 6 - 22	10	3.8	5.5	22	M=MH14	4	8mm
CELC 10 - 22	6	4.7	7.1	22	M=MH14	4	8mm
CEDB 16 - 50	6	5.5	8.5	50	M=MH14	4	20mm
CELC 16 - 44	6	5.5	7.9	44	M=MH14	4	18mm
CEDB 25 - 50	4	7.0	10.0	50	I=ECO50 DIE.UL100	4	20mm
CELC 25 - 48	4	7.1	9.5	48	I=ECO50 DIE.UL950	4	18mm
CEDB 35 - 50	2	8.2	12.5	50	I=ECO50 DIE.UL125	4	20mm
CELC 35 - 48	2	8.2	11.2	48	I=ECO50 DIE.UL112	4	18mm
CEDB 50 - 56	1/0	10.0	14.5	56	I=ECO50 DIE.UL145	4	22mm
CELC 50 - 48	1/0	9.5	12.8	48	I=ECO50 DIE.UL128	4	18mm
CEDB 70 - 56	2/0	11.5	16.5	56	I=ECO50 DIE.UL165	4	22mm
CELC 70 - 52	2/0	11.2	14.7	52	I=ECO50 DIE.UL147	4	20mm
CEDB 95 - 70	3/0	13.5	19.0	70	I=ECO50 DIE.UL190	4	30mm
CELC 95 - 54	3/0	13.4	17.4	54	I=ECO50 DIE.UL174	4	22mm
CEDB 120 - 70	4/0	15.5	21.0	70	I=REC-5510 DIE.UL210	4	30mm
CELC 120 - 66	4/0	15.6	20.6	66	I=REC-5510 DIE.UL206	4	28mm
CEDB 150 - 80	300 MCM	17.0	23.5	80	I=REC-5510 DIE.UL235	4	35mm
CELC 150 - 66	300 MCM	16.7	22.5	66	I=REC-5510 DIE.UL225	4	28mm
CEDB 185 - 85	350 MCM	19.0	25.5	85	I=REC-5510 DIE.UL255	4	37mm
CELC 185 - 66	350 MCM	18.4	24.2	66	I=REC-5510 DIE.UL242	4	28mm
CEDB 240 - 90	500 MCM	21.5	29.0	90	I=REC-5510 DIE.UL290	4	42mm
CELC 240 - 91	500 MCM	21.2	28.2	91	I=REC-5510 DIE.UL282	4	42mm
CEDB 300 - 100	600 MCM	24.5	32.0	100	I=REC-5510 DIE.UL320	4	45mm
CELC 300 - 91	600 MCM	23.5	31.3	91	I=REC-5510 DIE.UL313	4	42mm
CEDB 400 - 150	750 MCM	27.5	38.5	150	C=CRIMP-FT-1000-DIE-H385	4	70mm
CELC 400 - 91	750 MCM	26.8	34.8	91	C=CRIMP-FT-1000-DIE-H348	4	42mm

Connectors can be provided with dimple, v-knotch or straight inspection vents.