



## COPPER BUTT SPLICE CONNECTOR COLOR CODED

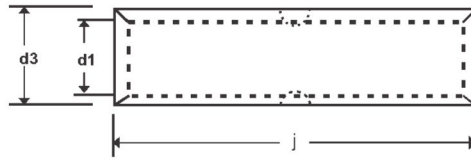

PART NO.	CABLE SIZE	d1	d3	j	MARKING INFORMATION	TOOL RECOMMENDED DIE REFERENCE	NO. OF CRIMPS	STRIP LENGTH
CE 900	8	4.70	7.01	30.00	8 MH14 -RED	M=MH14	3	13mm
CE 910	6	5.41	8.51	35.00	6 MH14-BLU	M=MH14	3	15mm
CE 920	4	6.96	10.00	40.00	4 UL 100-GREY	I=ECO50 DIE.UL100	4	18mm
CE 940	1	9.88	14.00	50.00	1-UL 140-PINK	I=ECO50 DIE.UL140	4	24mm
CE 950	1/0	11.36	15.50	50.00	2/0 UL155-BLK	I=ECO50 DIE.UL155	4	24mm
CE 960	2/0	11.95	16.61	55.00	2/0 UL166-ORG	I=ECO50 DIE.UL166	4	26mm
CE 970	3/0	13.39	18.00	60.00	3/0 UL180-PUR	I=ECO50 DIE.UL180	4	28mm
CE 980	4/0	15.06	19.51	65.00	4/0 UL194-YEL	I=ECO50 DIE.UL195	4	32mm

Connectors can be provided with dimple, v-knotch or straight inspection vents.

## COPPER IN LINE CONNECTOR-FLARED MOUTH SERIES

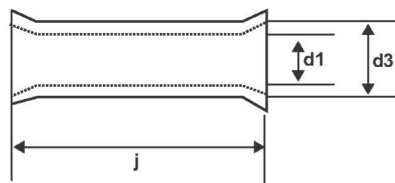

PART NO COPPER FINISH	PART NO TIN FINISH	WIRE RANGE	DIMENSIONS IN INCHES			TOOL RECOMMENDED DIE REFERENCE	NO. OF CRIMPS	STRIP LENGTH
			d1	d3	j			
CE 333	CE 333 T	8	4.7244	6.350	27.940	M=MH14	4	12mm
CE 334	CE 334 T	6	5.5928	7.925	29.210	M=MH14	4	14mm
CE 335	CE 335 T	4	7.1374	9.042	30.988	M=MH14	4	14mm
CE 336	CE 336 T	2	8.4328	10.668	34.036	IZ=ECO50 DIE.UL106	2	16mm
CE 337	CE 337 T	1	8.9408	11.176	34.036	IZ=ECO50 DIE.UL111	2	16mm
CE 338	CE 338 T	1/0	10.1854	12.649	39.624	IZ=ECO50 DIE.UL126	2	18mm
CE 339	CE 339 T	2/0	11.5824	14.224	45.974	IZ=ECO50 DIE.UL142	2	20mm
CE 340	CE 340 T	3/0	12.9286	15.621	48.260	IZ=ECO50 DIE.UL156	2	22mm
CE 341	CE 341 T	4/0	14.9352	17.628	62.484	IZ=ECO50 DIE.UL176	2	26mm